


- NOTES:
- 1. POROUS LENGTH: AVAILABLE IN CUSTOM LENGTHS UP TO 1500mm.
 - 2. AVAILABLE WRAP ANGLES & P/N's (XXX's DENOTE THE POROUS LENGTH):
 - A. 110: S38150XXX-110
DESIGNED FOR USE IN 90° FILM-WRAP APPLICATIONS.
 - B. 220: S38150XXX-220
DESIGNED FOR USE IN 180° FILM-WRAP APPLICATIONS.
 - C. 330: S38150XXX-330
DESIGNED FOR USE IN 270° FILM-WRAP APPLICATIONS.
 - 3. ANODIZE:
 - A. HOUSING: BLACK ANODIZE.
 - B. END PLUGS & JOURNALS (IF APPLICABLE): CLEAR ANODIZE.
 - 4. MOUNTING OPTIONS:
 - A. JOURNAL MOUNT USING STANDARD 10" JOURNAL, P/N 38-0083.
*MAY BE CUT-TO-LENGTH FOR AN ADDITIONAL CHARGE.
 - B. FLUSH-MOUNT USING 3X MOUNTING HOLES ON EACH END.
 - 5. FOR AIRTURNS UP TO 1000mm LONG, MAX $\nabla = .010$ ". FOR AIRTURNS OVER 1000mm LONG, MAX $\nabla = .015$ ".

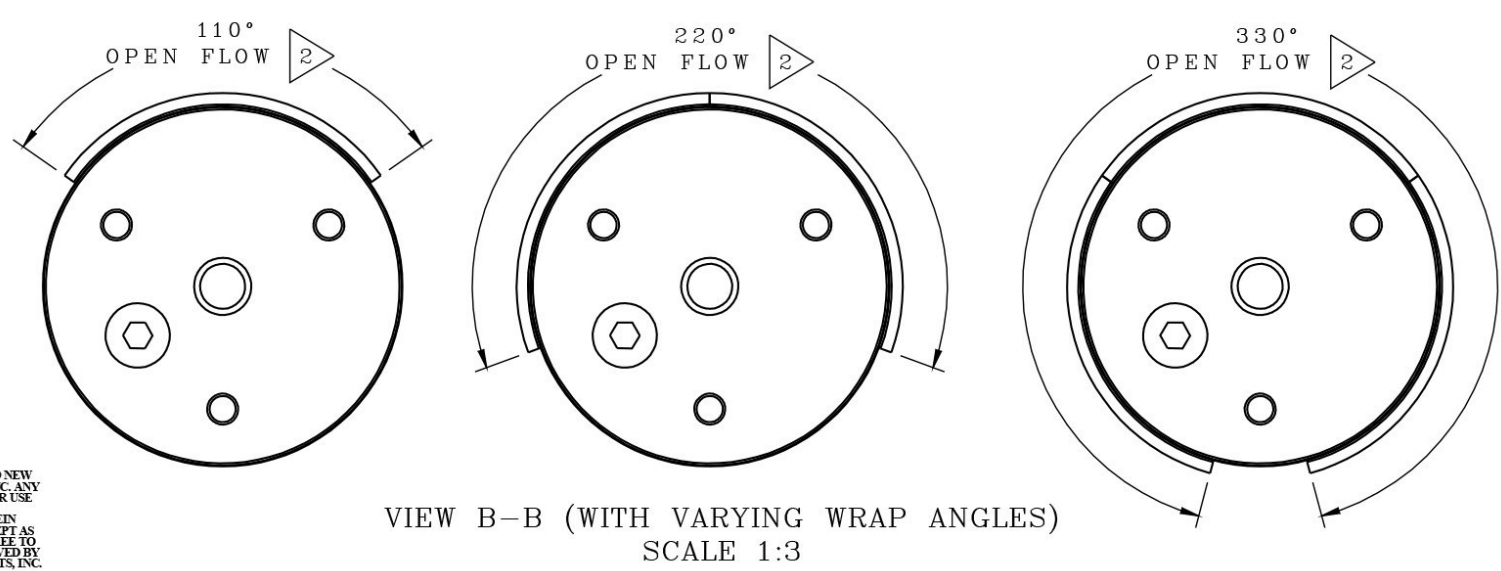

PROPRIETARY ITEM:
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO NEW WAY MACHINE COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN IS EXPRESSLY PROHIBITED EXCEPT AS NEW WAY MAY OTHERWISE AGREE TO IN WRITING. ALL RIGHTS RESERVED BY NEW WAY MACHINE COMPONENTS, INC.

TOLERANCES UNLESS OTHERWISE SPECIFIED ANGLES: $\pm 1/2^\circ$ DECIMALS: XX $\pm .01$ XXX $\pm .005$ FRACTIONS: $\pm 1/64$ SURFACE ROUGHNESS: $\sqrt{63}$ RMS MAX. BREAK ALL SHARP EDGES: .005-.020	TITLE: STANDARD 150mm OD AIRTURN		NEWWAY air bearings	
	DRAWN: EJS	DATE: 01/07/20		
	CHECKED:	DATE:	HEAT TREAT:	DWG. TYPE:
	SCALE: 2:7	SHT. 1 OF 2	FINISH: BLACK & CLEAR ANODIZE PER MIL-A-8625 TYPE 2	DWG. # S38150XXX-YYY
USED ON (NW #):			REV. -	