


2X M5X0.8 - 6H ∇ .30 [7.6]
MIRRORED ON OPPOSITE FACE

2X 1.91 [48.45]

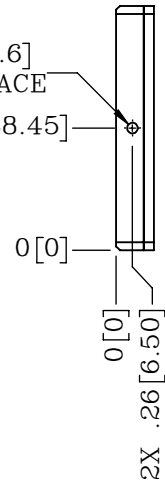

4X R.13 [3.18]

3.81 [96.90]

7.75 [196.90]


4X M5X0.8 - 6H ∇ .30 [7.6]
MIRRORED ON OPPOSITE FACE

4X .26 [6.50]

0 [0]

2X 1.91 [48.45]

2X 5.84 [148.45]

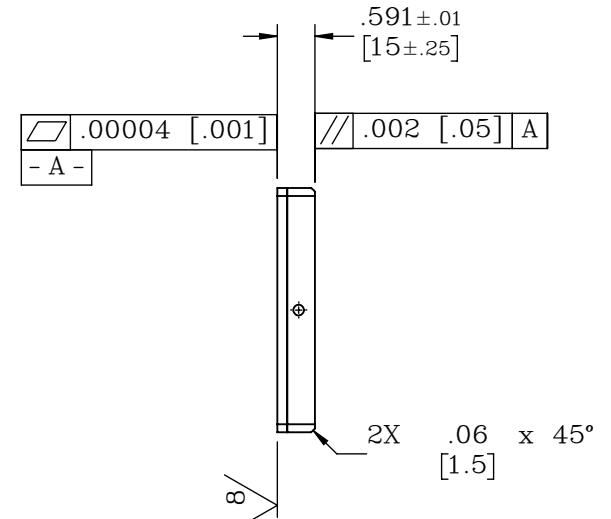

- NOTES:
- EACH PART WILL BE SHIPPED WITH SET SCREW PLUGS.
SEAL PLUG THREADS USING LOCTITE 401 OR A COMPARABLE C.A. GLUE.
OTHER SEALING METHODS MAY PUT UNDO STRESS ON THE PART AND AFFECT BEARING PERFORMANCE

PROPRIETARY ITEM:
THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO NEW WAY MACHINE COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN IS EXPRESSLY PROHIBITED EXCEPT AS IN WRITING. ALL RIGHTS RESERVED BY NEW WAY MACHINE COMPONENTS, INC.

CUSTOMER PRINT

TOLERANCES UNLESS OTHERWISE SPECIFIED ANGLES: $\pm 1/2^\circ$ DECIMALS: XX \pm .01 XXX \pm .005 FRACTIONS: $\pm 1/64$ SURFACE ROUGHNESS: \sqrt{R} RMS MAX. BREAK ALL SHARP EDGES: .005-.020	TITLE: 96.9mm X 196.9mm STANDARD BONDED BEARING		NEWWAY air bearings	
	DRAWN: EJS	DATE: 03/30/17		
SCALE: 1:3	SHT. 1 OF 1		HEAT TREAT: -	
	USED ON (NW #): -		FINISH: BLACK ANODIZE	
DWG. # S17097215			REV. A	