


NEW-SEAL[®]
by **NEWWAY**[®]

NON-CONTACT SEALING FOR THE TOUGHEST SEALING CHALLENGES

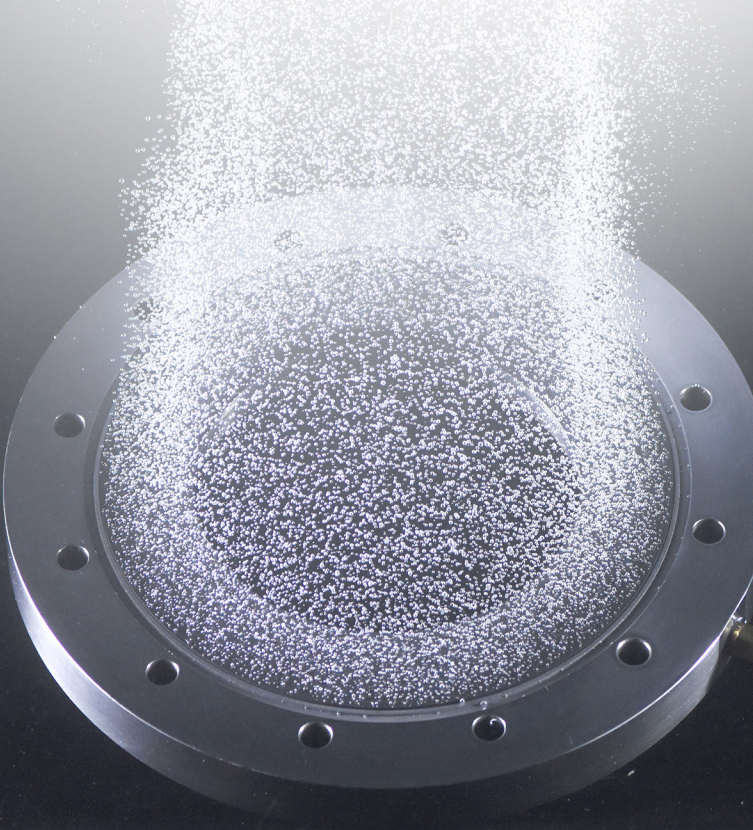

All the Benefits of Air Bearings — **Now In a Low Profile**

New-Seal[®] products employ Externally Pressurized Porous Media to remove friction, providing a non-contact seal. New-Seal[®] products offer a highly engineered solution for demanding rotating equipment.

FRICTIONLESS | LEAK-FREE | WEAR-FREE

NEWWAY

(888) 891-5510 | WWW.NEW-SEAL.COM

New-Seal® Applications

Dry & Bulk Powder Applications

Mixers • Blenders • Rotary Air Locks • Screw Conveyors

Liquid & Gas Sealing Applications

Pumps • Compressors • Turbo Expanders • Motors & Generators

New-Seal® Product Line




Standard Materials

Seals: Carbon Graphite

Housing: 316 SST, FDA Compliant Materials Available


O-rings: Fluoroelastomer



Face Seals

6 standard sizes and custom orders available

Thrust bearing capability • Adaptive hardware available



Circumferential Seals

Custom order • Journal bearing capability

Adaptive hardware available

FOR MORE INFORMATION CONTACT YOUR SALES REPRESENTATIVE TODAY.

New-Seal® products employ Externally Pressurized Porous Media to remove friction, providing a non-contact seal. Built on more than 25 years of experience with air bearings, New-Seal® products offer a highly engineered solution for demanding rotating equipment.

NEWWAY

(888) 891-5510 | WWW.NEW-SEAL.COM